

POLYCOR™ PLATINUM™

HDPE PIPING SYSTEM



POLYCOR HDPE (PE- RT)

THERMACOR'S POLYCOR PLATINUM piping system is a factory-fabricated, pre-insulated piping system for below or above ground distribution of hot and chill water. The system is designed with a High Density Polyethylene (HDPE) carrier pipe, closed cell polyurethane foam insulation, and an HDPE jacket. Carrier pipe is PlatinumStripe® 1800 Series PE- RT as manufactured by Performance Pipe. Temperature rated up to 180°F at 100 psi.

Carrier Pipe

- High Density Polyethylene (HDPE), High Temperature
- SDR as required by engineer


Polyurethane Insulation

- Density
- "K" Factor
- Compressive Strength
- Closed Cell Content

> 2.0 lbs/ft³
 ≤ 0.18 @ 75°F
 > 30 psi
 ≥ 90% @ 75°F

Jacket

- High Density Polyethylene (HDPE)

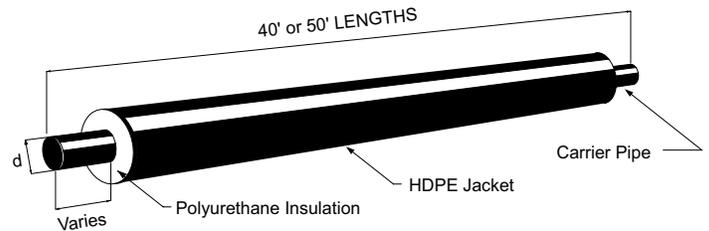

SPECIFICATION GUIDE *

GENERAL

All underground and above ground piping materials transporting chill water and hot water shall be **POLYCOR HDPE** as manufactured by **THERMACOR PROCESS INC.** All pre-insulated pipe, fittings, insulating materials, and technical support shall be provided by the Pre-insulated Piping System manufacturer.

SERVICE PIPE

The carrier pipe shall be high density polyethylene (HDPE), raised temperature, conforming to ASTM D-3350. Pipe shall be PlatinumStripe® 1800 pipe as manufactured by Performance Pipe. Standard Dimensional Ratio (SDR) wall thickness in standard IPS sizes. SDR 11 Typical. Operating temperature up to 180°F at 100 psi.

INSULATION

Insulation of the service pipe shall be rigid polyurethane foam with a minimum 2.0 lbs/ft³ density, 90% minimum closed cell content, and a “K” factor not higher than .18 at 75°F per ASTM C518. The polyurethane foam shall be CFC-free. The polyurethane foam shall completely fill the annular space between the service pipe and jacket, and shall be bonded to both. Insulation shall be provided to the minimum insulation thickness specified, within manufacturing tolerances.

JACKET

The outer protective jacket shall be High Density Polyethylene (HDPE). The HDPE jacket shall be seamless and pressure-tested for watertight integrity. PVC, FRP, HDUP or tape materials are not allowed.

FITTINGS

Carrier pipe fittings of the same material and pressure rating shall be heat fusion butt-welded to adjacent pipe sections. Fittings that are butt fusion welded in the field are not insulated. End seals at uninsulated fittings shall be the same as specified for the straight runs of pipe. If fittings are factory manufactured, fittings are pre-insulated using factory PE fitting covers welded to the jacket.

FIELD JOINTS

Service pipe shall be hydrostatically tested as per the Engineer’s specification with a factory recommendation of 1.5 times the specified pressure of the system. Straight joint sections shall be insulated using urethane foam to the thickness specified, jacketed with split sleeve, and sealed with a heat shrink sleeve. All joint closures and insulation shall occur at straight sections of pipe. All insulation and jacketing materials shall be furnished by THERMACOR.

INSTALLATION

Installation of the piping system shall be in accordance with the manufacturer’s instructions. Factory trained field technicians shall be provided for critical periods of installation, unloading, field joint instruction, and testing.

** For alternate specifications, please contact THERMACOR.*

THERMACOR PROCESS INC. Your Authorized THERMACOR Representative Is:

1670 Hicks Field Road East
Fort Worth, Texas 76179-5248
P.O. Box 79670

Phone (817) 847-7300
Fax (817) 847-7222
www.thermacor.com

The information contained in this document is subject to change without notice. THERMACOR PROCESS INC. believes the information contained herein to be reliable, but makes no representations as to its accuracy or completeness.

THERMACOR PROCESS INC. sole and exclusive warranty is as stated in the Standard Terms and Conditions of Sale for these products. In no event will THERMACOR PROCESS INC. be liable for any direct, indirect, or consequential damage.



POLYCOR PLATINUM

Specification Guide

PCSG

10.301

STANDARD SPECIFICATION

2.04.2021

Pre-insulated Polyethylene Piping Systems

Part 1 - General

1.1 Pre-insulated Piping - Furnish a complete system of factory pre-insulated polyethylene piping for the specified service. All pre-insulated pipe, fittings, insulating materials, and technical support shall be provided by the Pre-insulated Piping System manufacturer.

1.2 The system shall be **POLYCOR PLATINUM HDPE** manufactured by **Thermacor Process Inc.** of Fort Worth, Texas.

Part 2 - Products

2.1 Carrier pipe shall be high density polyethylene (HDPE), raised temperature, conforming to ASTM D-3350 and the specification standards listed below. Pipe shall be Platinum Stripe 1800 as manufactured by Performance Pipe. Pipe and fittings are manufactured from extra high molecular weight polyethylene compound and fabricated to Standard Dimensional Ratio (SDR) 11 wall thickness in standard IPS sizes. Operating temperature up to 180°F at 100 psi (125 psi for DR 9).

2.2 Insulation shall be polyurethane foam either spray applied or injected with one shot into the annular space between carrier pipe and jacket with a minimum thickness of one inch. Insulation shall be rigid, 90% closed cell polyurethane with a 2.0 to 3.0 pounds per cubic foot density and coefficient of thermal conductivity (K- Factor) of 0.18 and shall conform to ASTM C-591. Maximum operating temperature shall not exceed 250°F. Insulation thickness shall be specified by calling out appropriate carrier pipe and jacket size combinations, and shall not result in less than 1" thickness.

2.3 Jacketing material shall be extruded, black, high density polyethylene (HDPE), having a minimum wall thickness of 100 mils for jacket sizes less than or equal to 12", 125 mils for jacket sizes larger than 12" to 24", and 150 mils for jacket sizes greater than 24". The inner surface of the HDPE jacket shall be oxidized by means of corona treatment, flame treatment (patent pending), or other approved methods. This will ensure a secure bond between the jacket and foam insulation preventing any ingress of water at the jacket/ foam interface.

2.4 Straight run joints consisting of pipe and jacket are butt fusion welded and field insulated using urethane foam to the thickness specified and jacketed with heat shrinkable sleeve over the HDPE sleeve mold. Joints can be made beside the trench or inside the trench.

2.5 Carrier pipe fittings shall be heat fusion butt-welded to adjacent pipe sections. Fittings are to be insulated in the field with insulation kits provided by Thermacor. Kits consist of fitting cover, foam, and heat shrink tape. Bare and loose fittings are to be provided by the manufacturer, with the field insulation kits. At engineer's option, fittings can be factory insulated with 18" tangents on each end.

Part 3 - Execution

3.1 Field-engineered piping systems shall be fabricated from factory insulated sections of straight pipe and fittings. When practical, piping shall be provided in 40-foot double-random lengths. All HDPE piping shall have ends cut square in preparation for butt fusion welding.

3.2 Carrier pipe joining shall be accomplished using an authorized butt fusion welding machine preheated to the correct pipe temperature for fusion welding. All heating surfaces shall be clean and free of dirt and residue before applying to ends of pipe to be joined. After heating, the softened ends are pressed together by the machine and held until the joint has hardened. Improperly accomplished, uneven, or joints with questionable appearance shall be cut out and re-accomplished. Transitions to other piping materials shall be accomplished using suitable flanged or mechanical adapters.

3.3 Underground systems shall be buried in a trench of not less than two feet deeper than the top of the pipe and not less than eighteen inches wider than the combined O.D. of all piping systems. A minimum thickness of 24 inches of compacted backfill over the top of the pipe will meet H-20 highway loading.

(Continued)



POLYCOR PLATINUM

Specification Guide

STANDARD SPECIFICATION

PCSG
10.302

2.04.2021

3.4 Trench bottom shall have a minimum of 6” of sand as a cushion for the piping. All field cutting of the pipe shall be performed in accordance with the manufacturer’s installation instructions.

3.5 A hydrostatic pressure test shall be performed before insulating the field joints or burying the system, and shall be performed per the Engineer’s specifications. The factory recommended pressure test consists of an expansion phase and a test phase. Care shall be taken to insure all trapped air is removed from the system prior to the test. The expansion phase consists of an initial pressurization period of three hours at one and one-half times the normal system operating pressure. Make-up water shall be added to the system during this period to maintain the desired pressure. The test shall commence immediately after the expansion phase. The pressure shall be reduced by 10 psi and the test clock started. System pressure remaining within 5% of the target test pressure for one hour indicates no leakage has occurred. If the entire test procedure cannot be completed within eight hours of the initial pressurization, the system shall be depressurized and allowed to relax for a minimum of eight hours before another test is attempted. The piping system shall be restrained from uncontrolled movement in the event of a failure. *Appropriate safety precautions shall be taken to guard against possible injury to personnel in the event of a failure.*

3.6 Field service, if required by project specifications, will be provided by a certified manufacturer's representative or company field service technician. The technician will be available at the job to check unloading, storing, and handling of pipe, joint installation, pressure testing, and backfilling techniques. This service will be added into the cost as part of the project technical services required by the pre-insulated pipe manufacturer.